

COMMERCIAL & INDUSTRIAL ENERGY STORAGE SOLUTION





ACCESSIBLE TO 100 MILLION

PEOPLE IN 10 YEARS

CONTENTS

01 ABO • GLO

02 THE • APP

03 PRO

- STO
- STO
- ALPI

04 SMA

- EMS 4.0

DUT ALPHAESS DBAL SERVICE NETWORK	P01
STORY OF "STORION"	P05
PRION-TB250/500 PRION-LC372 PHACS-H20-DC-LC	P09
ART ENERGY	P31

• ALPHACLOUD

ABOUT ALPHAESS

Founded in 2012, AlphaESS is now one of the world-leading energy storage solution and service providers. The company specializes in delivering pre-eminent fit-for-purpose product solutions covering the full power range from small portable power stations all the way up to large utility-scale solutions. With 30+ subsidiaries in the globe, AlphaESS provides local services and supports 150,000+ systems actively running in over 100+ countries.

(L) **12+** Years since Establishment

(a) 150,000+ Systems Installed Globally







100+ **Countries & Regions**



mann

iF & Reddot & G-mark Design Award



TOP BRAND PV (STORAGE & INVERTERS)



GLOBAL SERVICE NETWORK





THE STORY OF "STORION" **C&I SOLUTION**

2024 1.5 GWh and LSES DEPLOYED WORLDWIDE

Since the launch of our Commercial and Industrial solutions until 2024, AlphaESS has installed a total of over 1.5 GWh C&I systems around the globe. The majority of these deployments have been in regions lacking reliable power infrastructure, providing millions of individuals access to dependable and sustainable clean energy sources.

2018 INTERNATIONAL RECOGNITION

Our rural electrification projects in Myanmar was selected by the Intersolar Europe committee as one of the 10 finalists for "outstanding projects award".

2017 MILESTONE PROJECT OVER 1 MWH

AlphaESS completed its first large C&I project in Cambodia, installing a 500kW/1.26MWh energy storage container. This milestone project provides steady and cheap electricity to a local pharmaceutical factory and its workers.

2015 THE FIRST C&I PROJECT

The first STORION series for commercial application were delivered in six petrol stations (20kW/60kWh × 6) in remote areas of Indonesia where power outages were frequent.

2013 THE ORIGIN OF THE NAME STORage + Lithium-ION = STORION

capacity.



a series dedicated for commercial and industrial applications in AlphaESS. Our STORION solution for rural electrification and power resilience applications today are ranging from 30kW to 500kW inverter power and 54kWh to 2MWh in storage



APPLICATIONS









STORION-TB250/500

250 / 500 kW | 630 ~ 2090 kWh



STORION-LC372

372 kWh per cabinet, up to 4.47 MWh



AlphaCS-H20-DC-LC

3727.3 kWh



10 🛕 AlphaESS

STORION-TB250/500

250/500 kW | 630 ~ 2090 kWh

AC-Coupled and DC-Coupled solutions are both available

- Liquid-cooling solution: higher safety and extended lifespan
- ► On/Off-grid switching time≤ 20ms
- Flexible capacity configuration 209 kWh per cabinet, up to 10 cabinets in parallel Battery capacity ranges: 630 ~ 2090 kWh
- ► DC-Coupled up to 160% PV oversize
- Various working modes for different application scenarios
- ► LFP battery cell, high security, long cycle life



AC Container (PCS included)



STORION-TB250/500 is an AlphaESS liquid-cooling C&I product for large-scale C&I application, the container has EMS, PCS, STS, transformer, air conditioner, fire extinguishing devices and other equipment. Customers can choose different power range according to their application scenarios.

Easy Installation

Devices and batteries are pre-assembled at the factory Only external wiring at first installation

► Flexible Configuration

PCS is available in 250/500 KVA two options The battery capacity ranges from 630 kWh ~ 2090 kWh


Safety

Active tempreature monitoring and control at 23 \pm 2°C

Smoke & temperature detection, automatic alarm system


Expandable Capacity

AC-coupled solution supports a maximum of 4 systems in parallel, reaching a maximum of 2MW power and 8MWh battery capacity.

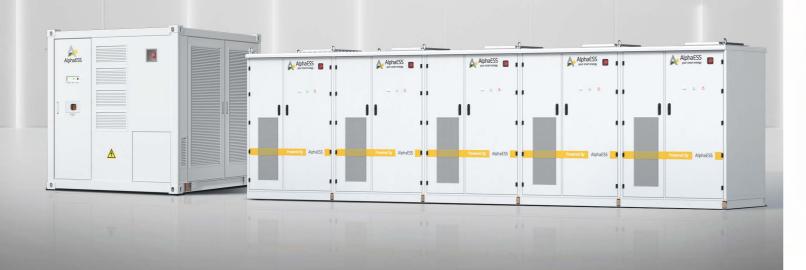


SOLUTIONS



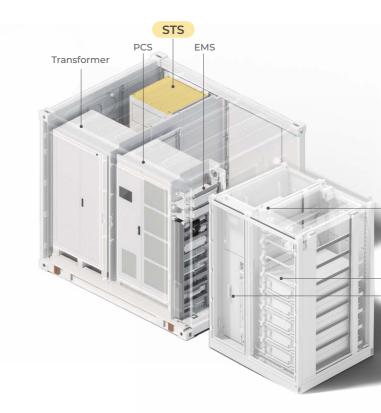

DC-Coupled

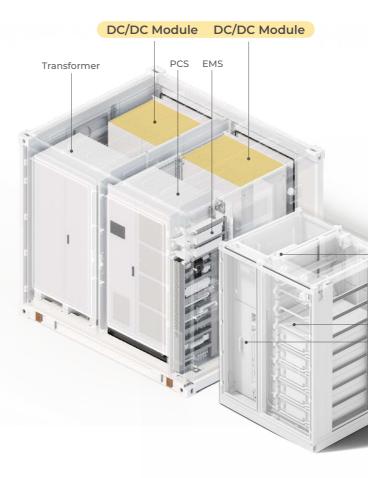

Inverter Power	250 / 500 kW
Battery Capacity	209 kWh per cabinet, up to 2.09 MWh
Rated Power	0.5 P
Dimensions (W x D x H)	2438 x 2991 x 2591 mm
Expandability	Scaleable

Battery Protection Unit (BPU)

Battery Module Liquid-Cooling Unit


Inverter Power	250 / 500 kW
Battery Capacity	209 kWh per cabinet, up to 2.09 MWh
Rated Power	0.5 P
PV Input Power	up to 800 kWp
Dimensions (W x D x H)	2438 x 2991 x 2591 mm

Battery Protection Unit (BPU)

Battery Module Liquid-Cooling Unit

SOLUTIONS

AC-Coupled System

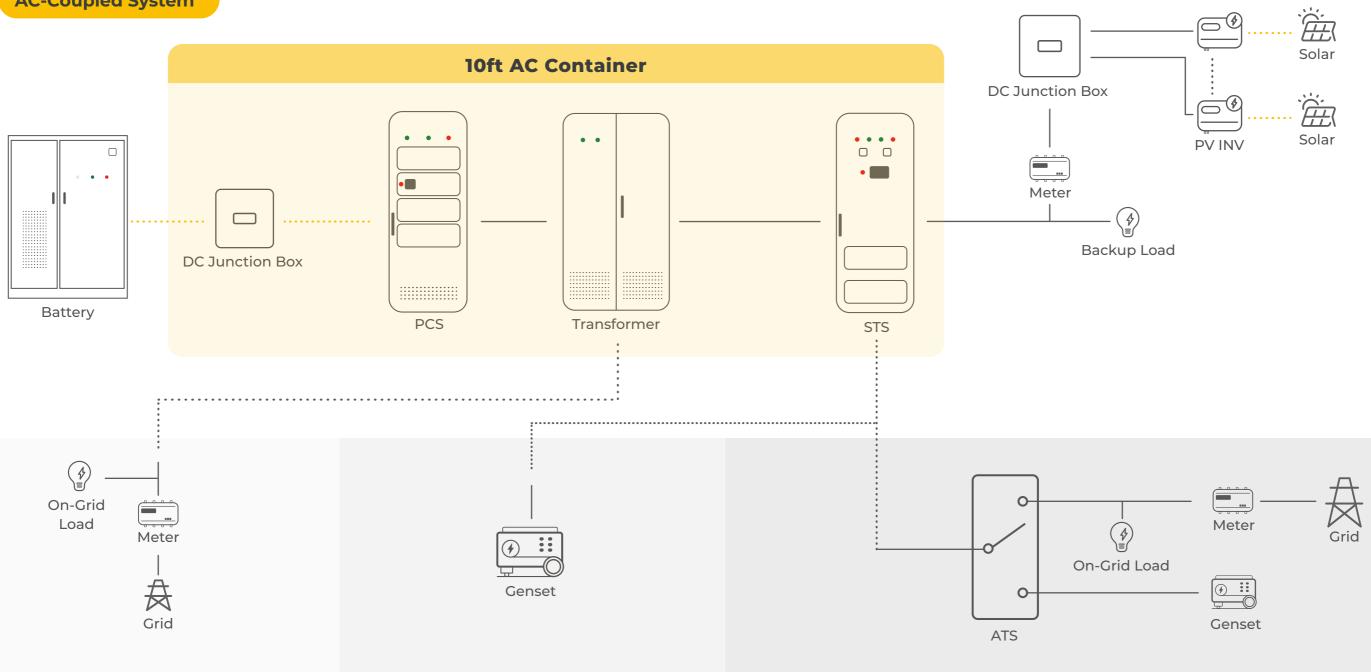

SCENARIO 1 On-Grid System

By integrating grid, solar, and battery sources, our system allows customers to select various operating modes. In the event of a grid outage, the on-grid load will be disconnected, and the system will automatically switch to supplying backup load, keeping you unaffected by power disruptions.

SCENARIO 2 Off-Grid System

The generator is managed by the EMS via dry contact, allowing users to control its operation based on preset schedules, battery SOC, or manually. This setup ensures continuous operation of either the generator or the STORION system at any given time. Both the diesel generator and the STORION system work together seamlessly, guaranteeing a reliable power supply for customers residing in remote off-grid areas.


SCENARIO 3 Dual Power Supply System

This solution requires an additional ATS device for seamless power source switching. In the event of a grid outage, the ATS will automatically switch to the generator side. The EMS controls the generator's operation, ensuring continuous power supply. This setup ensures that either the generator or the STORION system is always operational, guaranteeing uninterrupted backup power for essential loads.

16 AlphaESS

SOLUTIONS

DC-Coupled System

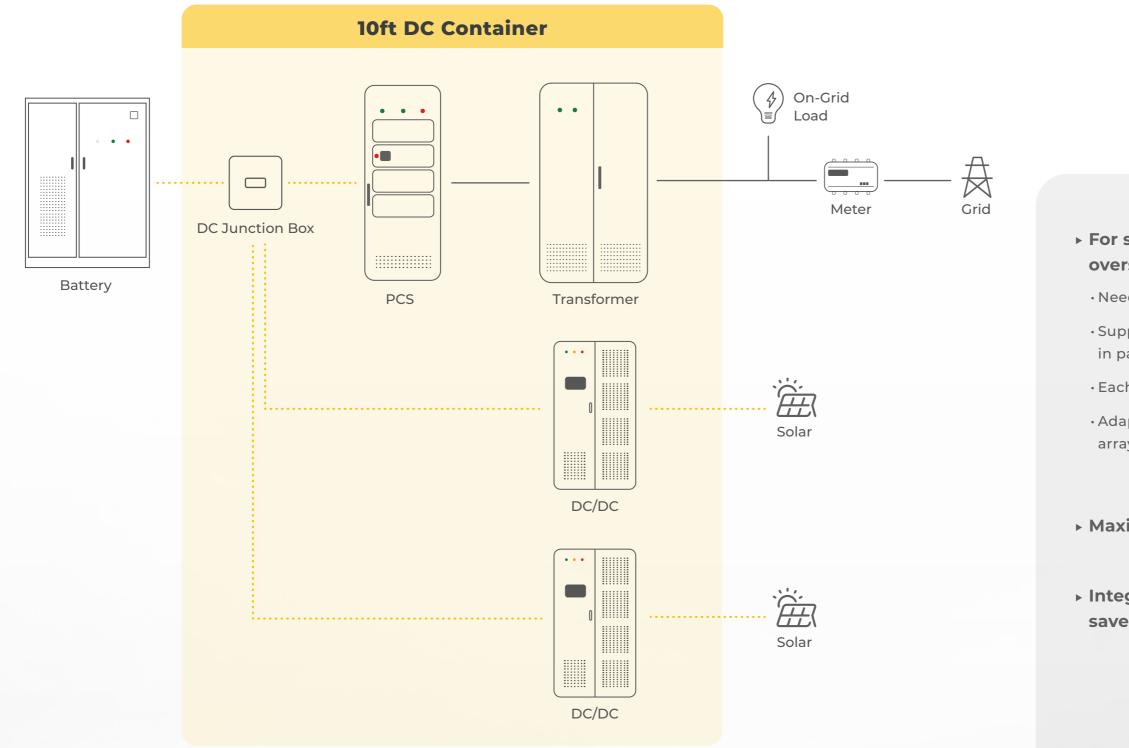

AlphaESS 17

For some scenarios with PV oversizing requirements

• Need extra DC/DC modules

• Support Max. two DC/DC modules in parallel

• Each DC/DC module has 8 MPPTS

• Adapt to multi-orientation PV arrays to maximize energy output

Maximum 160% PV oversizing

Integrated DC/DC modules in containers, saves space and installation time


COMPONENTS

--- DC / DC Module

· 400kVA, 8MPPTs

· Max. 2 Modules in Parallel Operation

The DC/DC module can be integrated into the TB series configuration to enable a DC-coupled solution. This module consists of eight 50kW DC/DC converters, each equipped with 8 MPPTs, and supports two units connected to TB series PCS in parallel. For TB500, up to 160% DC oversizing is attainable, optimizing energy utilization. During sunny conditions, part of the electricity output can be directed to supply the load while the other part charges the battery, effectively maximizing the self-consumption rate.



- STS 800kVA

· On/Off-Grid Switching Time ≤ 20ms

STS is responsible for switching between on-grid and off-grid states. When the system detects a grid abnormality, the STS can switch to off-grid mode within 20ms. This ensures that the electronic equipment connected to the system is not affected by a power outage. A rated power of 800kW ensures circuit safety during switching.

The TB series three-phase battery inverter is one of the best products on the market today. It has six power options to match different customer needs, and the product has a modular design with modular STS and Transformer for easy installation and lining up.

PCS TB250/500 Battery Inverter

• 4/8 × 62.5kVA PCS

 \cdot 340 \sim 460V , 50/60Hz, 3L/N/PE

PCS is an important component of a microgrid. It can bidirectional invert DC and AC, and adjust the current waveform to be consistent with the grid, to realize the interaction with the grid. It supports a range of voltages up to 460V, so multiple batteries and PV arrays can be connected in series or parallel.



-> Transformer 500kVA

\cdot Isolation and Transfer from Delta Grid to Star Grid

The transformer has a maximum input voltage of 380V and a maximum output voltage of 400V. In addition, it supports switching between star and delta circuits to isolate the grid and the devices connected to the system, thus maximizing the protection of the system from grid fluctuations.







COMPONENTS

BATTERY CLUSTER SYSTEM

Battery Module

Module Nominal Capacity Max. Charging/Discharging Current Depth of Discharge



98% (On-Grid), 90% (Off-Grid)

M166280-S


46.5 kWh


140 A



WIRING DIAGRAM

DC-COUPLED SOLUTION




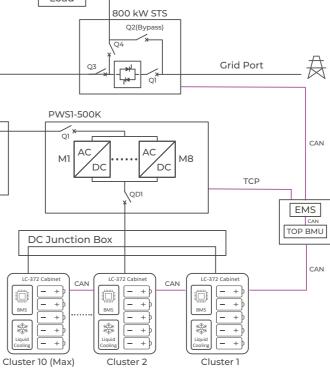

Configuration Rack

BLMU	HV1500250-II
Rated Voltage	Max. 1500V
Rated Current	Max. 250A
Operation Temperature	-30 ~ 50 °C
Dimensions (W x D x H)	526 × 650 × 250mm
Weight	30 kg



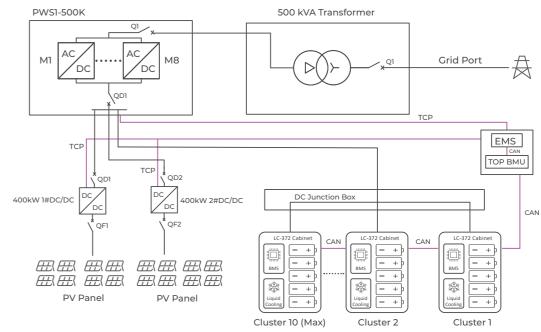

Battery Cabinet

STORION-LC372
209.6 kWh
3 ~ 10
810 x 1110 x 237.5 mm
IP 55
-30 °C ~ 50 °C





MULTIPLE UNITS EXPANSION

SCALEABLE

STORION-TB250/500 CONTAINERS IN PARALLEL

TOTAL POWER CAPACITY: 250kW/500kW/1MW/2MW...







STORION-LC372

372.7 kWh / 1500V Liquid-Cooling Battery Cabinet

Easy Installation

Most devices are pre-assembled at the factory Just install the battery and external wiring at first installation

Liquid-cooling solution

Built-in advanced liquid-cooling system provides excellent temperature management for battery cabinet. Reduced risk and longer life span.

Safety

Built-in aerosol and sprinkler system. Real-time monitoring of battery cells and ambient temperatures. Once the abnormal temperature and smoke is detected, the fire suppression system will be activated immediately.

Expandable Capacity

Single-system access up to 12 liquid-cooling battery cabinets, expandable to 4.47 MWh.



STORION-LC372

Model	
System Parameters	
Dimensions (W x D x H)	
System Weight	
Ingress Protection	
Rated Voltage	
Nominal Capacity	
Rated Charging and Discharging Power	
Battery Modules Connection	
Battery Chemistry	
Cooling	
Product Type	
Fire-Fighting System	
Battery Parameters	
Battery Model	
Rated Voltage	
Nominal Capacity	
Rated Charging and Discharging Power	
Ingress Protection	
Weight	
Dimensions (W x D x H)	
Operating Temperature Range	
Certification	
Transportation	
Compliance	IEC 62

Storion-LC-372

1700 x 1500 x 2450 mm

4.65 t

IP55

1331.2 V (8 Modules)

372.7 kWh (8 Modules)

186.3 kW (0.5C)

4 ~ 8 in series connection

LFP (LiFePO₄)

Liquid-Cooling

Outdoor Cabinet

Aerosol + Sprinkler

M166280-S

166.4 V

46.5 kWh

23.2 kW (0.5P)

IP67

333 kg

810 x 1100 x 237.5 mm

-30 °C ~ 50 °C

UN 38.3

C 62619, IEC 62477, IEC 61000, UL 9540A, UL 1973


AlphaCS-H20-DC-LC

3.72 MWh / 1500V Liquid-Cooling Battery Container

- Ultra-large capacity energy storage for diverse application scenarios (Utility projects)
- Liquid-Cooling System Enhances Temperature
 Control and Durability
- Multi-level safety protection with European IEC and American UL certification
- Built-in BMS system, real-time monitoring and management
- Noise reduction option available (< 75dB)





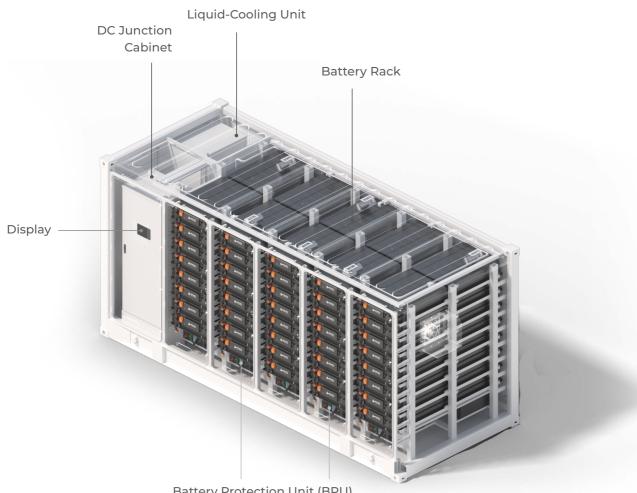

Battery I	Protection	Unit	(BPU
-----------	------------	------	------

Battery Type	Li
Nominal Capacity	37
Weight	35
Dimensions (W x D x H)	60
Housing	IP:
DC Voltage Range	112
Rated Power	0.5
Cooling	Lic
Operating Temperature	-3(

iFePO4 727.3 kWh 5 t 058 x 2438 x 2896 mm P55 123.2 ~ 1497.6 V).5 P iquid-Cooling 30°C ~ 50°C

AlphaCS-H20-DC-LC

Model	
System Parameters	
Dimensions (W x D x H)	
System Weight	
Ingress Protection	
Rated Voltage	
Nominal Capacity	
Rated Charging and Discharging Power	
Battery Cluster Connection	
Battery Chemistry	
Cooling	
Product Type	
Fire-Fighting System	
Battery Parameters	
Battery Model	
Rated Voltage	
Nominal Capacity	
Rated Charging and Discharging Power	
Ingress Protection	
Weight	
Dimensions (W x D x H)	
Operating Temperature Range	
Certification	
Compliance	

AlphaCS-H20-DC-LC

6058 x 2438 x 2896 mm

35 t

IP55

1331.2 V

3727.3 kWh

1863.6 kW (0.5 P)

10 Clusters in Parallel

LFP (LiFePO₄)

Liquid-Cooling

Outdoor Container

Aerosol + Sprinkler (Perfluorohexanone is optional)

M166280-S

166.4 V

46.5 kWh

23.2 kW (0.5 P)

IP67

333 kg

810 x 1110 x 237.5 mm

-30 °C ~ 50 °C

IEC 62619, IEC 62477, UL 9540A, UL 1973, IEC 61000

SMART ENERGY

EMS 4.0

EMS4.0, the fourth generation of AlphaESS's EMS products, was officially released in 2024. Since the first release in 2013, the R&D team has continually updated the EMS to meet market demands and technological advancements. Its robust performance and features assist users in commercial and industrial sectors in tackling complex issues, adapting to various applications, and offering versatile solutions.



Alpha ESS EMS 4.0

Rich Functions

Self-Consumption; multiple time periods charging and discharging; SOC calibration; PmeterOffset; Peak Shaving; Modbus scheduling (RTU); Battery-only function; Diesel control; Dual power supply function; API data reading; Remote upgrade

· Friendly Display

SCADA monitoring system, display screen with Windows operating system; Space-saving and Security

Space-Saving and Security

Integrated battery DC convergence cabinet in the box, and external SCADA HMI display screen, space-saving and an additional layer of box protection, increasing security.

Reserved Communication Port

It is convenient for users to control other equipments through the STORION system.



DC Junction Cambinet

AlphaCloud

- Customizable system scheme drawing for clearer demonstration of energy flow.
- Cell level monitoring to help monitor the energy storage system in all aspects.
- Visualization of energy production and consumption statistics, helping users to clearlyunderstand the situation of power consumption.
- Remote configuration and upgrading, eliminating the pain point that installers need come to the site to deal with all issues.
- One page contains monitoring of all systems installed, helping users to carry out daily maintenance efficiently.







ENERGY STORAGE SOLUTIONS

Residential

Commercial & Industrial

Utility



Alpha ESS Europe GmbH

- europe@alpha-ess.de
- www.alphaess.de
- O Alfred-Herrhausen-Allee 3-5, 65760 Eschborn

We reserve the right to make technical changes and updates at any time. The values, services and other information, illustrations or drawings contained in this data sheet, brochures and other offer documents are only examples and are subject to ongoing Revision and adaptation. Insofar as the information has not been expressly designated by us as binding, this information does not constitute an assurance. The information in the binding order acceptance or the purchase contract shall apply.

V01.19112024 | Text and images correspond to the current state of technology at the time of printing. Subject to modifications. All information is without guarantee in spite of careful editing - liability excluded.